

Test Report

Compression Properties of Hunt Pipeline Annulus Filler Compound #670 – Slow Set

October 15, 2022

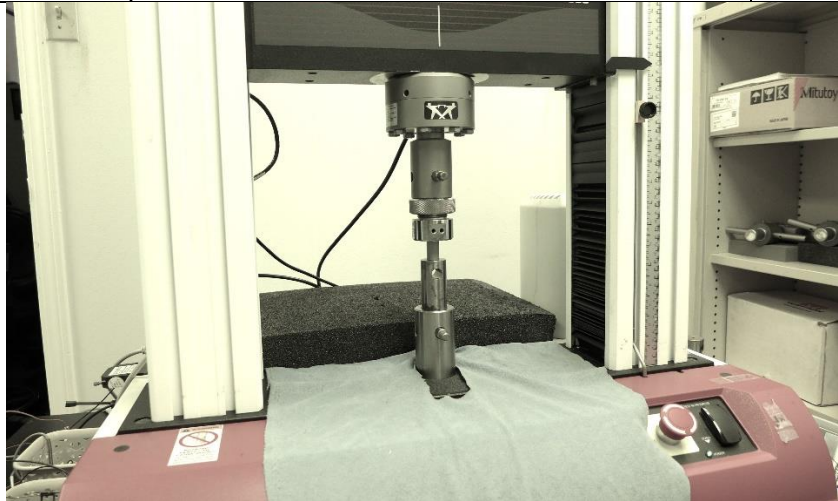
Prepared by

Benjamin T. A. Chang, PhD, PE, FNACE
President of PolyLab
3rd Party Coating Test Lab, Coating Expert Witness
Certified NACE Protective Coating Specialist
Certified AMPP Coating Inspector
10400 Westoffice Dr. Ste 106
Houston, TX 77042
(713) 783-7659
PolyLab@gmail.com
www.PolyLabLLC.com

Test Report

Compression Properties of Hunt Pipeline Annulus Filler Compound #670 – Slow Set
By Benjamin T. A. Chang, PhD, PE, FNACE, President of PolyLab

1. Test Method

Test Standard	ASTM D695
Crosshead Speed	0.05 inch/min
Test Temperature	25 C
	
<p>Filler Cylinder Sample under compression</p>	

2. Test Result

Sample #	OD, in	Length, in	Modulus, ksi	Compressive Strength, ksi
#3	0.6190	1.0405	24.4	8.17
#4	0.6200	1.0400	23.4	7.61
#5	0.6135	1.0435	26.7	8.27
#7	0.6270	1.0400	23.9	7.59
#8	0.6275	1.0415	24.5	7.80
Mean	0.6214	1.0411	24.6	7.89
Std Dev	0.0059	0.0015	1.3	0.32